



Since 1966

Tubular Specialties Manufacturing, Inc.

13011 South Spring Street, Los Angeles, CA 90061-1685
Phone 800/CALL TSM (800/225-5876) or 310/515-4801
online www.grabbar.com • Fax 310/217-0653


5200

Technical Data

Revised July 2001

Page 1 of 2

Semi-Recessed Paper Towel Dispenser and Waste Receptacle

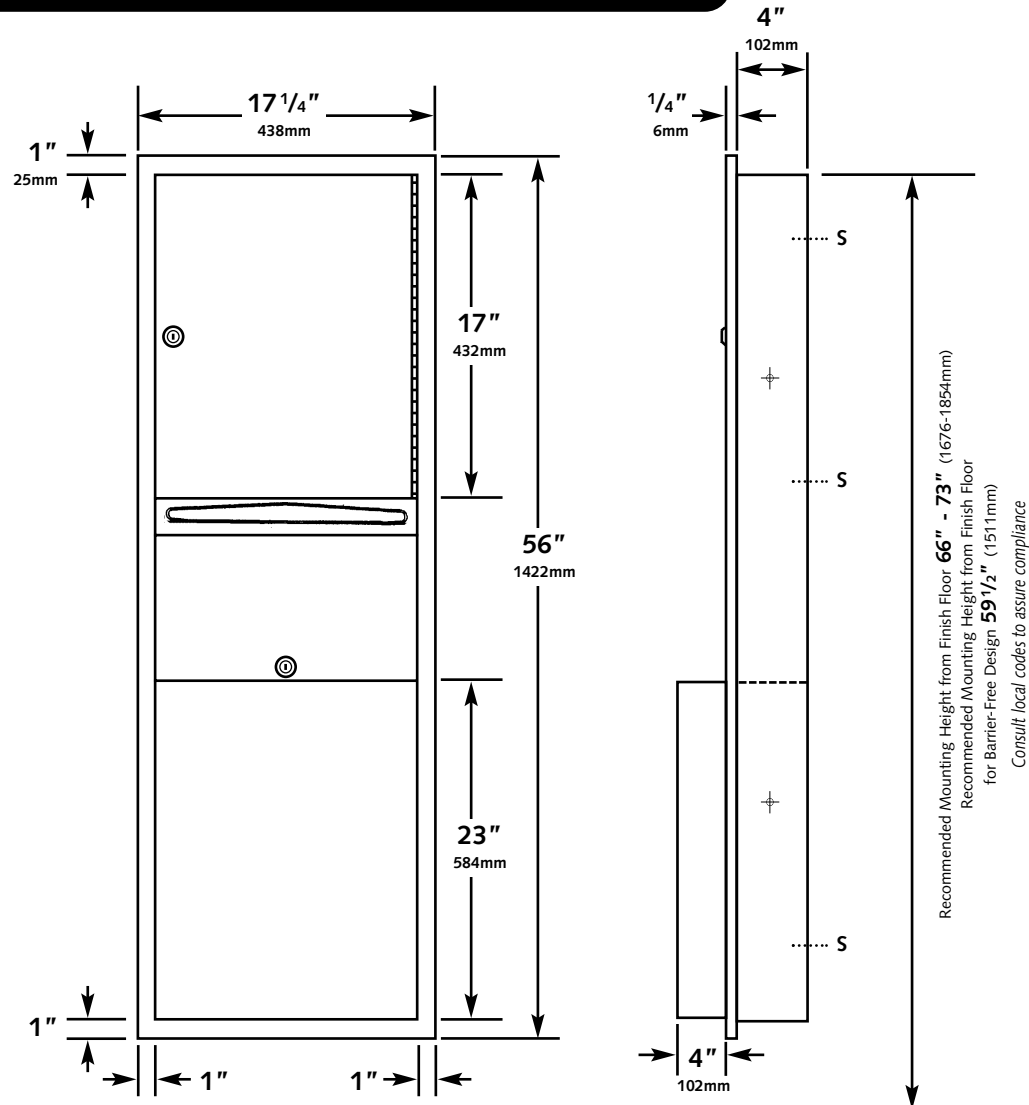

Design Considerations

- The centered lock on the cabinet door resists vandalism. Doors are easier to wedge open if locks are located under the door.
- Dispenser accommodates either C-fold or multi-fold towels with use of adapters (provided with unit).



Model Numbers

- **5200-12**Semi-Recessed, 4" Deep (102mm)
- **5200-12-S2**Model 5200-12 with stainless steel collar for semi-recess in 2" wall (50mm)
- **5200-12-S4**Model 5200-12 with stainless steel collar for surface mounting
- **5200-18**Model 5200-12 with 18 gallon receptacle; projects 8" from wall (203mm)



Suggested Architectural Specification

TSM Model _____ [5200-12] [5200-12-S2] [5200-12-S4] [5200-18] Semi-Recessed Paper Towel Dispenser and Waste Receptacle from Tubular Specialties Manufacturing, Inc., Los Angeles, California, 310/515-4801 or 800/Call TSM (800/225-5876).

Construction: Stainless steel type 304 (18-8) 22 gauge (0.8mm) satin finish, welded. Mounting Frame: [Recessed] [Surface Mounted]. Flange: Drawn, one-piece seamless construction with no mitered corners. Door: Secured to cabinet with full-length stainless steel piano hinge and tumbler lock; replaceable in the field. Dispenser Capacity: 600 C-fold or 800 multi-fold paper towels without use of adapters. Receptacle Capacity: _____ [12] [18] Gallons.



Materials/Workmanship

Cabinet	Stainless steel type 304 (18-8) 22 gauge satin finish (0.8mm). Flange is drawn, one-piece seamless construction with no mitered corners. Screw holes are countersunk to prevent interference with towel dispensing.
Door	Stainless steel type 304 (18-8) 22 gauge satin finish with double panel construction. Full-length stainless steel piano hinge is screwed to cabinet. Pin tumbler lock is centered on door.
Paper Towel Dispenser	Stainless steel type 304 (18-8) 22 gauge satin finish. Dispensing mouth has hemmed edge for safety. Capacity: 600 C-fold or 800 multi-fold paper towels.
Receptacle	Stainless steel type 304 (18-8) 22 gauge satin finish (0.8mm). Secured to cabinet by pin tumbler cylinder lock. Four hooks provided to hold plastic trash bags (not supplied by TSM). Top and bottom edges hemmed for safety.
Skirt	Stainless steel type 304 (18-8) 22 gauge, formed and welded construction. <i>For 5200-12-S4 model only.</i>



Installation

1. Recommended mounting height from finish floor to top of cabinet (not flange) is 66" - 73" (1676-1854mm) standard and 59½" (1511mm) for barrier-free design compliance.
2. RECESSED INSTALLATION: Provide framed wall opening 15¾" wide x 54½" (400x1384mm) with a minimum recessed depth of 4¼" (108mm).
3. Multiple screw holes at sides of cabinet allow secure mounting in wood or metal framing. Position unit to avoid pipes, vents and conduits previously installed in wall.
4. After installing shims as required to give a solid base, complete installation using screws provided by manufacturer at locations marked by an "S".
5. SURFACE MOUNTING: With skirt in place, apply to wall with screws provided by manufacturer.

Manufacturer reserves the right to alter design or dimensions without formal notice and without incurring obligation.

© 2001, Tubular Specialties Mfg., Inc. All Rights Reserved



Guarantee

TSM 5200 Recessed Paper Towel Dispenser and Waste Receptacle is guaranteed against defects in workmanship and material for one year from shipping date.