



Since 1966

# Tubular Specialties Manufacturing, Inc.


13011 South Spring Street, Los Angeles, CA 90061-1685  
Phone 800/CALL TSM (800/225-5876) or 310/515-4801  
online www.grabbar.com • Fax 310/217-0653

# 5201

## Technical Data

Revised July 2001

# Recessed Paper Towel Dispenser

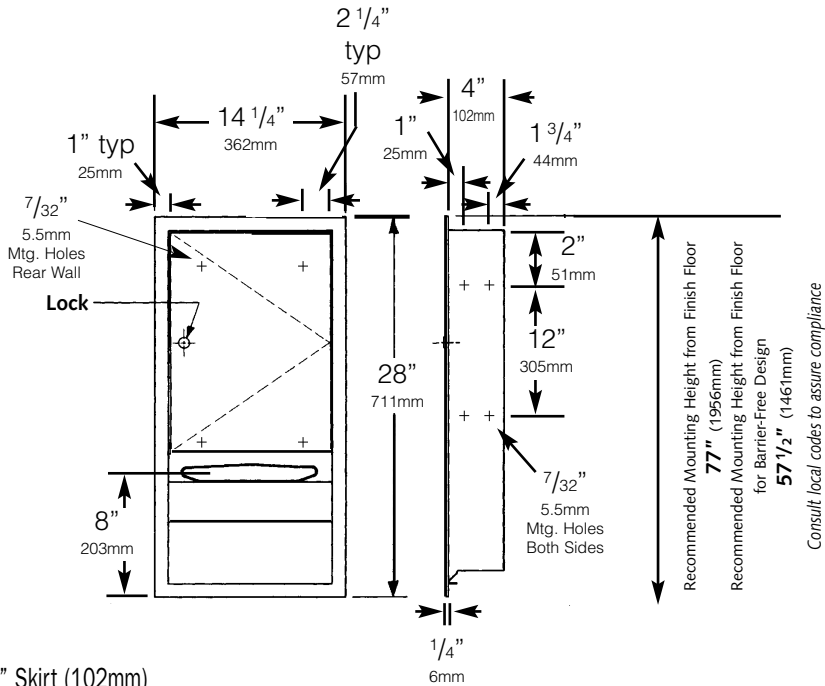

## Model Numbers

- 5201 . . . . .Recessed
- 5201-S4 . . . . .Surface Mounted with 4" Skirt (102mm)



## Suggested Architectural Specification

TSM Model [5201] [5201-S4] Paper Towel Dispenser from Tubular Specialties Manufacturing, Inc., Los Angeles, California, 310/515-4801 or 800/Call TSM (800/225-5876).  
Construction: Stainless steel type 304 (18-8) 22 gauge (0.8mm) satin finish, welded. Mounting Frame: [Recessed] [Surface Mounted].

Flange: Drawn, one-piece seamless construction with no mitered corners. Door: Secured to cabinet with full-length stainless steel piano hinge and tumbler lock. Capacity: 400 C-fold or 700 multi-fold paper towels without use of adapters.



## Materials/Workmanship

- Cabinet** Stainless steel type 304 (18-8) 22 gauge satin finish (0.8mm). Flange is drawn, one-piece seamless construction with no mitered corners. Screw holes are countersunk to prevent interference with towel dispensing.
- Door** Stainless steel type 304 (18-8) 22 gauge satin finish with double panel construction. Full-length stainless steel piano hinge is screwed to cabinet. Pin tumbler lock is centered on door.
- Paper Towel Dispenser** Stainless steel type 304 (18-8) 22 gauge satin finish. Dispensing mouth has hemmed edge for safety. Capacity: 400 C-fold or 700 multi-fold paper towels.
- Skirt** Stainless steel type 304 (18-8) 22 gauge, formed and welded construction. *For 5201-S4 model only.*



## Installation

1. Recommended mounting height from finish floor to top of cabinet is 77" (1956mm) standard and 57 1/2" (1461mm) for barrier-free design. Consult local codes to assure compliance.
2. Recessed Installation: Provide framed wall opening 12 1/2" wide x 26 1/2" high (318x673mm) with a minimum recessed depth from finish face of wall of 4 1/4" (108mm).
3. Position unit to avoid pipes, vents and conduits previously installed in wall.
4. Multiple screw holes at sides of cabinet allow secure mounting in wood or metal framing.
4. After installing shims as required to give a solid base, complete installation using screws provided by manufacturer as locations marked by an "S".
5. Surface Mounting: With skirt in place, apply to wall with screws provided by manufacturer.

Manufacturer reserves the right to alter design or dimensions without formal notice and without incurring obligation.



## Guarantee

TSM 5201 Recessed Paper Towel Dispenser is guaranteed against defects in workmanship and material for one year from shipping date.