


Tubular Specialties Manufacturing, Inc.

13011 South Spring Street, Los Angeles, CA 90061-1685 Phone 800/Grab Bar (800/472-2227) or 310/515-4801 www.GrabBar.com • Fax 310/217-0653 5232

Surface-Mounted Paper Towel Dispenser

Technical Data

Revised April 2006

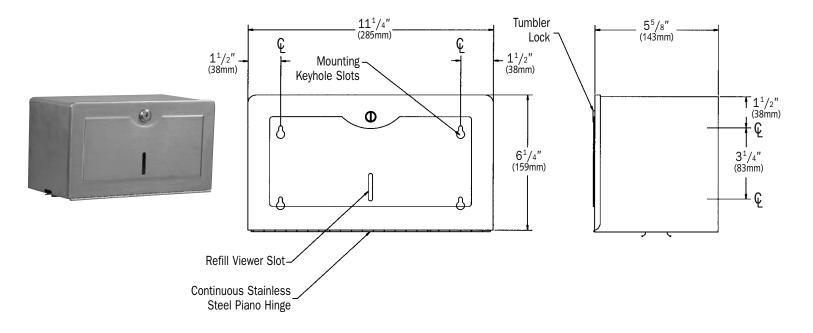



Specification

Surface-Mounted Paper Towel Dispenser shall hold and dispense 400 standard single-fold paper towels. Unit shall be fabricated of alloy 18-8 type 304 stainless steel, 22 gauge. Towel dispensing slot shall have a fully-deburred edge for snag-free dispensing and user safety. Dispenser door shall be attached to bottom of unit with a full-length 3/16" (5mm) dia. multi-staked stainless steel piano hinge and shall be held closed with a tumbler lock keyed alike to other TSM washroom equipment. Structural assembly of body and door components shall be of welded construction. Door

shall be provided with a refill view indicator and be held closed with a tumbler lock. All exposed surfaces shall be #4 satin finish and shall be protected during shipment with PVC film easily removable after installation.

Surface-Mounted Paper Towel Dispenser shall be Model 5232 as manufactured by Tubular Specialties Manufacturing, 13011 South Spring Street, Los Angeles, California 90061, tel 800-Grab Bar.



Operation

Towels are self-feeding as withdrawn by hand until supply is depleted. Unit may be reloaded with a partial load in-place and

will continue to feed proerly. Low level of towel supply is indicated from 30% capacity to approximately 15% level. Locking door prevents unauthorized access or removal.



Installation

- Unit is surface mounted on wall through concealed mounting holes provided.
- It is the installer's responsibility to select fasteners that are appropriate for the wall or partition condition and application.
- 3. Accessories should be inspected periodically to make sure their attachment to the wall is not loosening.

