

Tubular Specialties Manufacturing, Inc.

13011 South Spring Street, Los Angeles, CA 90061-1685 Phone 800/Grab Bar (800/472-2227) or 310/515-4801 www.GrabBar.com • Fax 310/217-0653





Technical Data

Revised Jan. 2007

Free Standing Swing Top Waste Receptacle



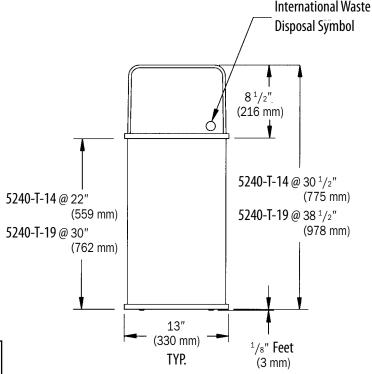

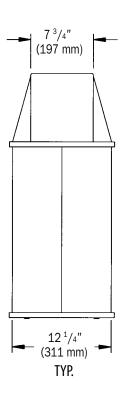

Capacity Options

- Model 5240-T-1414.3 gals (54 liters)
- ☐ Model 5240-T-1919.4 gals (73.4 liters)



Specification

Free Standing Swing Top Waste Receptacle shall have a capacity of [14.3] [19.4] gallons (54 or 73.4 liters). Unit shall be fabricated of alloy 18-8 type 304 stainless steel, 22 gauge with satin finish. Receptacle shall have two continuous vinyl wall protectors, top and bottom, around entire perimeter. Top shall be removable for easy maintenance and have two swing doors hung on heavy-duty spring-loaded stainless steel multi-staked piano

hinges to return doors to closed position. Bottom of receptacle shall be equipped with four (4) non-removable rubber supports. Each door shall have the international waste symbol affixed to it.

Free Standing Swing Top Waste Receptacle shall be Model [5240-T-14] [5240-T-20] as manufactured by Tubular Specialties Manufacturing, 13011 South Spring Street, Los Angeles, California 90061, tel 800-Grab Bar.



Operation

Waste material is deposted into the receptacle through the push-in doors. Waste can is manually emptied on a cycle determined by maintenance needs.

