


#### **Tubular Specialties Manufacturing, Inc.**


13011 South Spring Street, Los Angeles, CA 90061-1685 Phone 800/CALL TSM (800/225-5876) or 310/515-4801 www.GrabBar.com • Fax 310/217-0653

# **Recessed Toilet Seat Cover Dispenser**

Technical Data Revised June 2005

5315



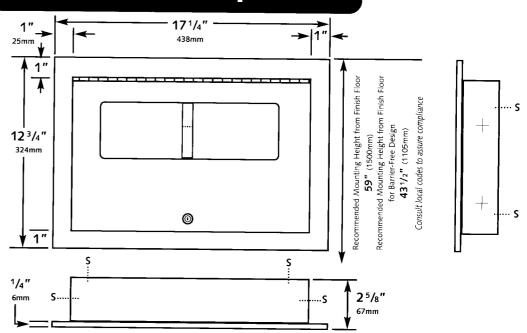



#### **Specification**

TSM Model 5315 Recessed Toilet Seat Cover Dispenser shall be stainless steel type 304 (18-8) 22 gauge (0.8mm) satin finish, welded. Flange shall be drawn, one-piece seamless construction with no mitered corners. Door shall be secured to cabinet with full-length stainless steel piano hinge and tumbler lock keyed alike to other

TSM equipment. Capacity shall be 500 single or half-fold toilet seat covers.

Recessed Mounted Toilet Seat Cover Dispenser shall be Model 5315 as manufactured by Tubular Specialties Manufacturing, 13011 South Spring Street, Los Angeles, California 90061, tel 800-Grab Bar.



### Operation

Dispenses single or half-fold toilet seat covers. Door unlocks with key to fill dispenser. Capacity: 500 toilet seat covers.



## Materials/Workmanship

- **Cabinet** Stainless steel type 304 (18-8) 22 gauge satin finish (0.8mm). Flange is drawn, one-piece seamless construction with no mitered corners.
  - **Door** Stainless steel type 304 (18-8) 22 gauge satin finish. Full-length stainless steel piano hinge is screwed to cabinet. Pin tumbler lock is centered on door.



#### Installation

- 1. Recommended mounting height from finish floor to top of cabinet (not flange) is 59" (1500mm) standard and  $43^{1/2}$ " (1105mm) for barrier-free design compliance.
- 2. Provide framed wall opening  $15^{3}/_{4}$ " wide x  $11^{1}/_{4}$ " height with a minimum recessed depth from finish face of wall of  $2^{5}/_{8}$ " (400x286x67mm).
- 3. Beware of construction from opposite wall that may

Manufacturer reserves the right to alter design or dimensions without formal notice and without incurring obligation. protrude into rough wall opening. Position unit and coordinate with mechanical engineer to avoid pipes, vents and conduits previously installed in wall.

- 4. Do not install units back-to-back in a common wall unless the finish-to-finish wall thickness is  $5^{1}/_{2}$ " (140mm) minimum.
- After installing shims as required to give a solid base, complete installation using screws provided by manufacturer as locations marked by an "S".

**'**uarantee

TSM 5315 Recessed Toilet Seat Cover Dispenser is guaranteed against defects in workmanship and material for one year from shipping date.