



## Tubular Specialties Manufacturing, Inc.

13011 South Spring Street, Los Angeles, CA 90061-1685

Phone 800/Grab Bar (800/472-2227) or 310/515-4801


www.GrabBar.com • Fax 310/217-0653

# 5362

## Dual Access Seat Cover & Toilet Paper Dispenser

### Technical Data

Revised September 2007

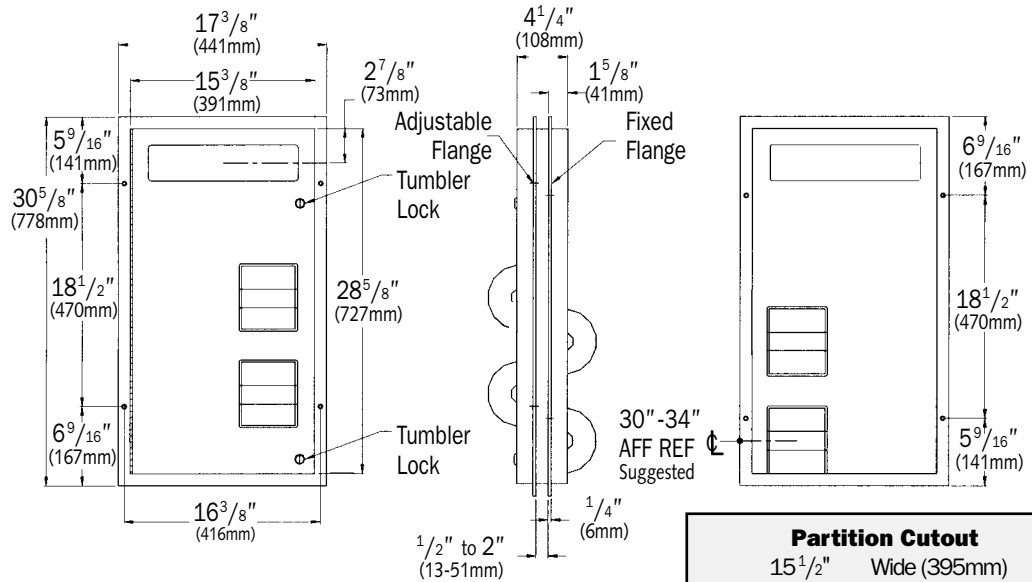

Partition Cutout	
$15\frac{1}{2}$ "	Wide (395mm)
$27\frac{7}{8}$ "	High (735mm)
Note: Cutout is $\frac{7}{8}$ " below top of face trim	



## Specification

Partition Mounted Dual Access Seat Cover and Toilet Paper Dispenser shall hold and dispense 1000 paper seat covers and four (4) rolls standard or 1800 sheet  $4\frac{1}{2}$ " x  $5\frac{1}{4}$ " (114mm x 133mm) dia. toilet paper. Removable waste container shall have a waste capacity of 1.3 gal (4.9 liters) or 300 in<sup>3</sup> (005 m<sup>3</sup>). Seat dispenser and toilet paper dispenser door shall be fabricated of 18 gauge type 304 stainless steel alloy 18-8. Face frame and cabinet shall be 22 gauge. All exposed surfaces shall have No. 4 satin finish and be protected by PVC film easily removed after installation. Seat cover cutout shall have a fully-deburred edge for snag-free dispensing and user safety. Cabinet door shall be attached to cabinet at side with a full-length  $\frac{3}{16}$ " (5mm) dia. stainless steel multi-staked piano hinge and shall

be held closed with two (2) tumbler locks keyed alike to other TSM Washroom Equipment. Face trims shall be 1" (25mm) wide formed from one piece with no mitres, welding or open seams and have  $\frac{1}{4}$ " (6mm) square returns to face of partition. Structural assembly of all components shall be of welded construction. Internal baffles shall prevent line-of-sight view from either side through unit at any time. Cabinet shall include theft- and vandal-resistant rollers that shall be of molded high-impact resistant plastic with integral molded-in stainless steel endpins and four (4) rollers shall be supplied.

**Dual Access Seat Cover & Toilet Paper Dispenser shall be Model 5362 as manufactured by Tubular Specialties Manufacturing, 13011 South Spring Street, Los Angeles, California 90061, tel 800-Grab Bar.**



## Operation

Seat covers are self-feeding until supply is depleted. Toilet paper rolls feed freely until depleted; level of supply is constantly visible. Toilet paper rolls and paper seat covers are serviced from one side for both stalls by unlocking and

opening door; locked door prevents inadvertent dumping and unauthorized removal. Toilet paper spindles are carried in vandal-resistant sub-frame accessible when door is opened. Barrier baffle panels preserve privacy between stalls at all times.



## Installation

1. Recommended mounting height from finish floor to top of unit is 57" to 61" (1448-1549mm) AFF (above finished floor). Note that partition cutout is  $\frac{7}{8}$ " (22mm) below top of face trim. Consult local codes to assure compliance.
2. Unit is mounted in partition. Partition cutout required is  $15\frac{1}{2}$ " W x  $28\frac{7}{8}$ " H. The adjustable flange will accommodate a partition thickness from  $\frac{1}{2}$ " to 2".
3. It is the installer's responsibility to select fasteners that are appropriate for the partition condition and application.
4. Accessories should be inspected periodically to make sure their attachment to the partition is not loosening.



## Guarantee

TSM 5362 Dual Access Seat Cover & TP Dispenser is guaranteed against defects in workmanship and material for one year from shipping date.