




Tubular Specialties Manufacturing, Inc.
 13011 South Spring Street, Los Angeles, CA 90061-1685
 Phone 800/Grab Bar (800/472-2227) or 310/515-4801
www.GrabBar.com • Fax 310/217-0653

M-032-R-B

Technical Data
 Revised January 2008

Framed Security Mirror
Rear Mounting

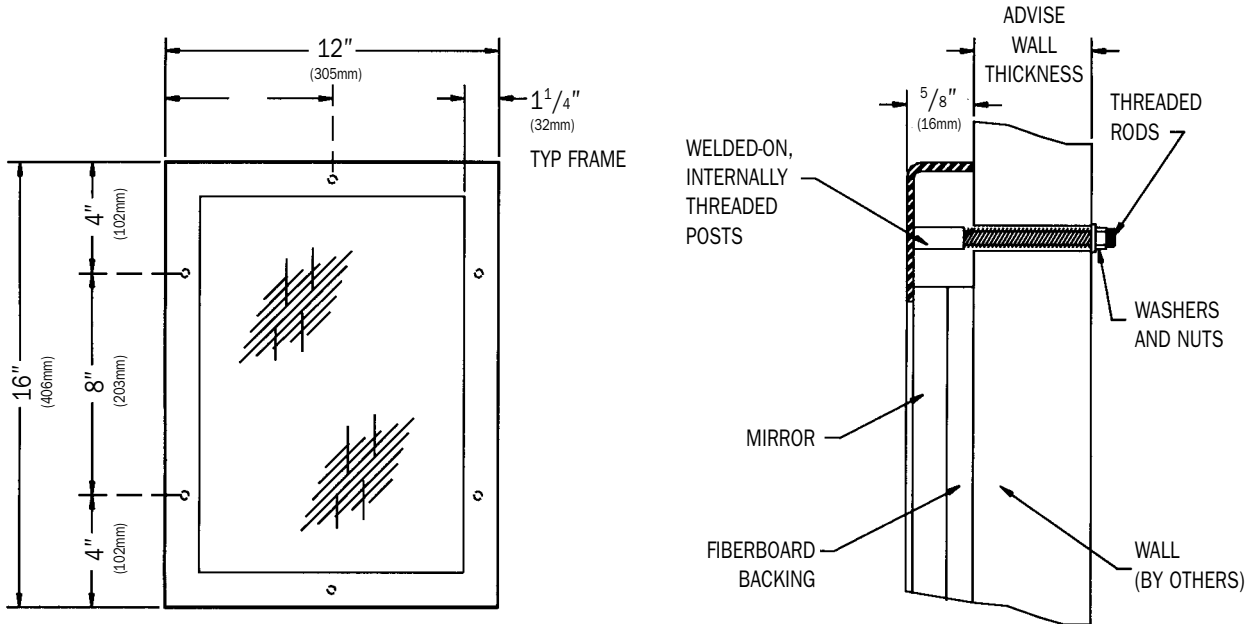

Specification

Chase Mounted Security Framed Mirror shall have frame fabricated of alloy 18-8 stainless steel, type 304, 14 gauge. Structural assembly of frame components shall be of welded construction with six (6) welded-on threaded posts. All exposed surfaces shall be #4 satin finish. Unit shall be provided with fiberboard backing. Glazing shall be 20 gauge stainless steel type 304 #8 polished finish. Mounting hardware shall be sized and supplied for a wall thickness [up to 6" 9152mm)] [8" (203mm)] [of _____ (specify thickness)].

Framed Security Mirror, Rear Mounting shall be model M-032-R-B as manufactured by Tubular Specialties Manufacturing, 13011 South Spring Street, Los Angeles, California 90061, tel 800-Grab Bar.



Installation

1. Unit is anchored through wall or partition using six (6) 1/4-20 threaded rods, washers and nuts (supplied by TSM).
 - Up to 6"
 - 8"
 - Over 8" (Thickness: _____).
2. For compliance with ADA Accessibility Guidelines, bottom edge of reflecting surface should be installed 40" (1016mm) maximum above finished floor.
3. For proper installation hardware selection, specify the wall thickness on which the unit is to be mounted as follows:
4. Accessories should be inspected periodically to make sure their attachment to the wall is not loosening.

Guarantee

TSM M-032-R-B Framed Security Mirror is guaranteed against defects in workmanship and material for one year from shipping date.