



Tubular Specialties Manufacturing, Inc.

13011 South Spring Street, Los Angeles, CA 90061-1685

Phone 800/Grab Bar (800/472-2227) or 310/515-4801


www.GrabBar.com • Fax 310/217-0653

SCV

Vinyl Shower Curtain

Technical Data

Revised October 2008

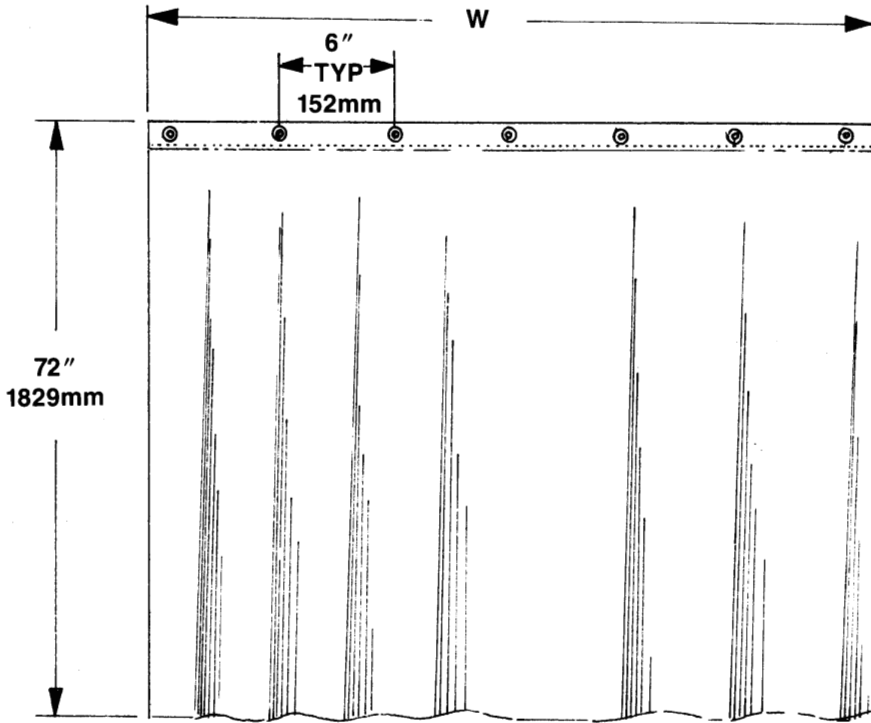

Standard Sizes for SCV Vinyl Shower Curtain

Model #	Width x Height	# of Hooks Required
SCV-36	36"W x 72"H	7
SCV-42	42"W x 72"H	9
SCV-48	48"W x 72"H	10
SCV-60	60"W x 72"H	13
SCV-72	72"W x 72"H	16
SCV-84	84"W x 72"H	19



Specification

Vinyl Shower Curtain shall be fabricated of .008 mil vinyl, anti-bacterial and flame-retardant. Vinyl film shall be formulated from virgin, chlorine-bearing vinyl resin with one-piece construction with lock-stitched hems. Nickel-plated brass grommets shall be machined into top hem at 6-inch intervals on center and shall have 1/4" inside diameter. Color shall be white unless translucent or almond are specified. Temperature range shall be -40°F (-40°C) to 130°F (54.4°C). Vinyl curtain shall conform to

Federal Specification L-C 780 A, L-C-780 A amendment 2, ASTM G-21-96 for mildew resistance ASTM 0-568 for self-extinguishing material and CID A-A-2398B, including NFPA 701 for flammability resistance.

Vinyl Shower Curtain shall be Model SCV as manufactured by Tubular Specialties Manufacturing, 13011 South Spring Street, Los Angeles, California 90061, tel 800-Grab Bar.



Installation and Maintenance

- For shower rod openings up to 36" wide, curtains should be specified 6" wider than the opening. For openings wider than 36", curtains should be specified 12" wider than the opening.
- Hooks are specified separately. See TSM hooks SC-HX in stainless steel and PC-HX and PC-HX-R in plastic.
- Vinyl curtain may be cleaned by hand with warm water or ammonia-based cleaner; avoid abrasive cleaners.



Guarantee

TSM SCV Vinyl Shower Curtain is guaranteed against defects in workmanship and material for one year from shipping date.