



## Tubular Specialties Manufacturing, Inc.

13011 South Spring Street, Los Angeles, CA 90061-1685

Phone 800/Grab Bar (800/472-2227) or 310/515-4801


www.GrabBar.com • Fax 310/217-0653

# SD-5

### Technical Data

Revised January 2008

## Surface Mounted Vertical Tank Soap Dispenser

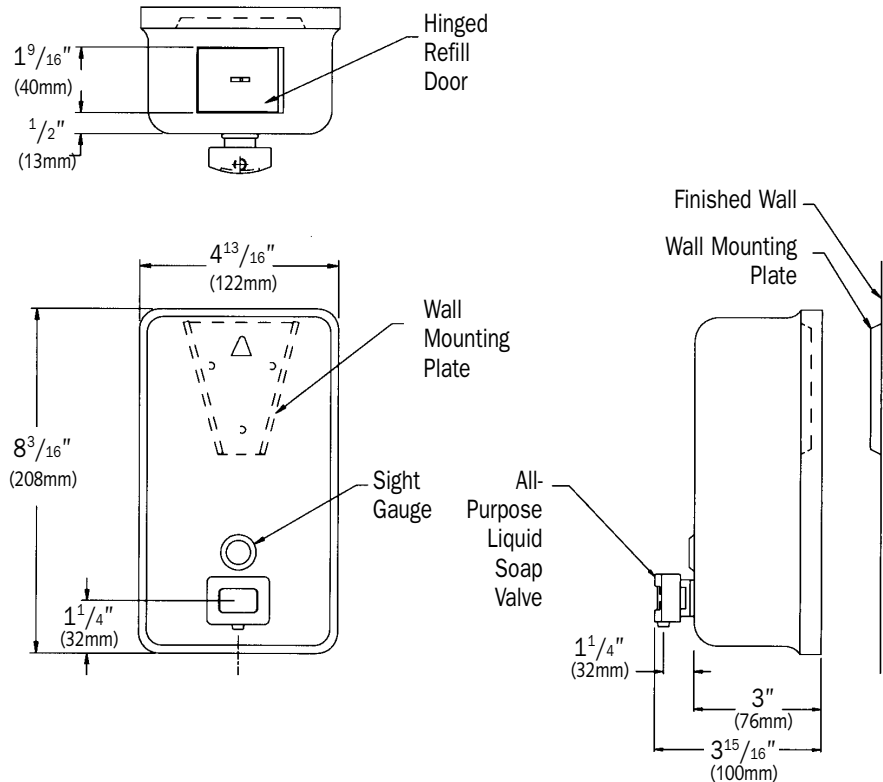

### Specification

Surface Mounted Vertical Tank Soap Dispenser shall have a capacity of 40 fluid oz. (1.18 liter) of liquid or lotion soaps, synthetic detergents and antibacterial soaps containing PCMX and/or Triclosan. Dispenser shall be fabricated of 20 gauge stainless steel, alloy 18-8 type 304. All exposed surfaces shall be #4 satin finish. Valve shall be constructed of a plastic valve body and push button with stainless steel and plastic internal parts. Valve operation shall comply with ADA Accessibility

Guidelines by requiring no more than 5 pounds (22.2 Newtons) pressure to actuate and require no grasping or twisting by operator. A tamper-resistant sight gauge shall be provided. Unit shall have a hinged stainless steel refill door on top of unit, which is opened with special key provided.

**Surface Mounted Vertical Tank Soap Dispenser shall be Model SD-5 as manufactured by Tubular Specialties Manufacturing, 13011 South Spring Street, Los Angeles, California 90061, tel 800-Grab Bar.**



### Operation

Push button to dispense soap. Unit is refilled through hinged door at top requiring special key (provided) to open. Soap tank

will continue to feed properly until soap level is below valve intake port. Tank supply is replenished manually on cycle determined by maintenance needs.



### Installation

1. Recommended mounting height for general utility from finish floor to bottom of tank is 42" (1066mm), or 6" (152mm) minimum above the washbasin.
2. Unit is surface mounted on wall or partition with wall mounting plate (supplied) and fasteners. It is the installer's responsibility to select fasteners that are appropriate for the wall or partition condition and application.
3. Unit is secured to interlocking wedge bracket and locked in place by a locking screw (supplied) installed through hinged refill door.
4. Accessories should be inspected periodically to make sure their attachment to the wall is not loosening.



TSM SD-5 Surface Mtd Vertical Tank Soap Dispenser is guaranteed against defects in workmanship and material for one year from shipping date.