


TSM

TUBULAR SPECIALTIES MFG., INC.

13011 S. SPRING ST., LOS ANGELES, CA 90061-1685 • 213/515-4801 TOLL FREE 800/421-2961 CA ONLY 800/521-7548
DESIGNER SERVICE: 7:00 A.M. TO 5:00 P.M. PACIFIC TIME • TELEX II: 910-346-6362 • FAX: 213/217-0653

360

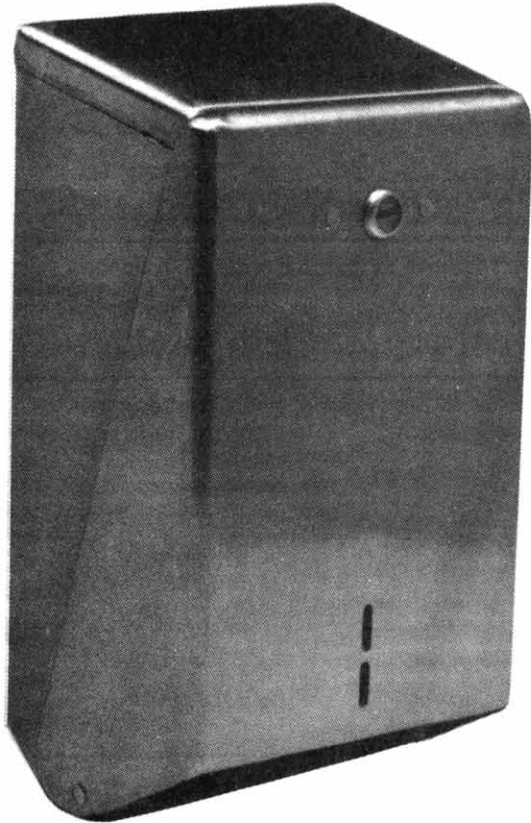

TOILET TISSUE DISPENSER



DESIGN CONSIDERATIONS

- The 360 is recommended for public applications such as schools or parks, for it is designed to resist vandalism. All edges are carefully rounded and deburred.
- Since the sloping cover on this unit purposely discourages its use as an ash tray or shelf, it is recommended that a shelf and ashtray (singly or in a combination unit) be included in each toilet stall. Suggested units include (but are not limited to) the 846 and 847 together or the S5-18B. (Ash trays, of course, should be specified with discretion in regard to age categories in school environments.)



FINISH (select one)

- #4 Satin (standard)
- Other (additional charge; see Finish Schedule, Reference Section A, for options)



OPERATION

Large capacity allows refilling with full standard tissue pack before dispenser is completely empty. Slots in cabinet door indicate when refill is required.



SUGGESTED ARCHITECTURAL SPECIFICATION

TSM model 360 Toilet Tissue Dispenser from Tubular Specialties Manufacturing, Inc., Los Angeles, California, (213) 515-4801. Construction: stainless steel Type 302 (18-8) 22 gauge (0.8mm). Finish: _____ (select from Finish Schedule). Capacity: either 1330 single-fold or 750 double-fold toilet tissue. Manufacturer's name is not shown on any exposed surface.



MATERIALS/WORKMANSHIP

Cabinet—Stainless steel Type 302 (18-8) 22 gauge (0.8mm). Vandal-resistant keyed lock. Capacity: 1330 single-fold or 750 double-fold toilet tissues.



INSTALLATION

Dispenser is surface mounted. Recommended mounting height is 32" (813mm) from finish floor to centerline of holder. Provide 8-1/4" (210mm) minimum clearance in front of unit for door to open for refilling. Screws are provided by manufacturer (see Installation, Reference Section C, for various applications).

