


TSM

TUBULAR SPECIALTIES MFG., INC.

13011 S. SPRING ST., LOS ANGELES, CA 90061-1685 • 213/515-4801 TOLL FREE 800/421-2961 CA ONLY 800/521-7548
 DESIGNER SERVICE: 7:00 A.M. TO 5:00 P.M. PACIFIC TIME • TELEX II: 910-346-6362 • FAX: 213/217-0653

SCFR

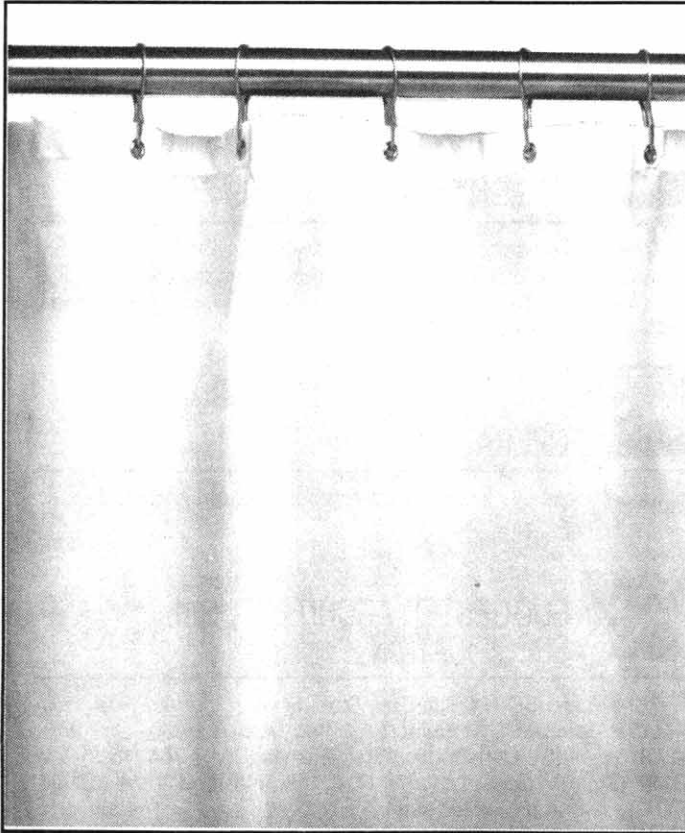

FLAME-RESISTANT SHOWER CURTAIN



DESIGN CONSIDERATIONS

- Because they are resistant to flame, static, bacteria and mildew, SCFR curtains are recommended for hospitals, nursing homes, etc.
- Specify curtains 6" (152mm) to 12" (305mm) wider than the shower rod length.
- For cross-reference information on TSM's shower curtains, please consult Shower Curtain Feature Comparison Table (Reference Section I).
- TSM also offers shower curtain hooks in stainless steel and white plastic, as well as curtain rods of many varieties, including exposed and concealed flange models, slotted rods, corner configurations, etc., to accompany its shower curtains.



FINISH (select one)

- White (standard)
- Other (additional charge; see Finish Schedule, Reference Section A, for options)



SUGGESTED ARCHITECTURAL SPECIFICATION

TSM model SCFR Flame-Resistant Shower Curtain from Tubular Specialties Manufacturing, Inc., Los Angeles, California, (213) 515-4801. Construction: vinyl-laminated fiberglass with flame, static, bacteria, and mildew resistance; fitted with nickel-plated brass grommets. Color: _____ (select from Finish Schedule). Size: _____ (fill in width) wide x 72" (1829mm) long.



MATERIALS/WORKMANSHIP


Curtain—Vinyl-laminated fiberglass. Resistant to flame, static, bacteria and mildew. Seams and hem lock stitched. May be cleaned by hand with warm water or ammonia-based cleaner; avoid abrasive cleansers. Standard sizes are listed in chart below; custom sizes are available upon request.

Grommets—Brass, nickel plated for rust resistance. 1/4" (6mm) opening, spaced 6" (152mm) apart.



DISTRIBUTION

TSM maintains a worldwide network of distributors. Call your sales representative listed in Reference Section O for the names of those nearest you.

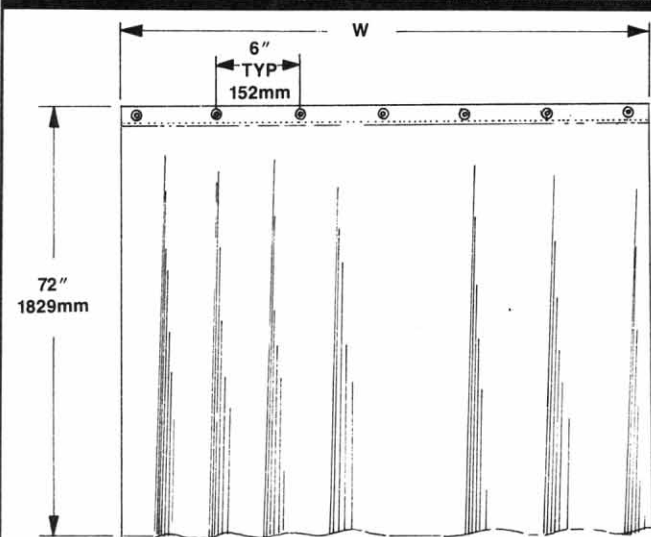

Standard Sizes for Flame-Resistant Shower Curtain

Width	Length	Number of Hooks Required
36"	72"	7
48"	72"	8
54"	72"	10
72"	72"	13
90"	72"	16
108"	72"	19