


TSM

TUBULAR SPECIALTIES MFG., INC.

13011 S. SPRING ST., LOS ANGELES, CA 90061-1685 • 213/515-4801 TOLL FREE 800/421-2961 CA ONLY 800/521-7548
DESIGNER SERVICE: 7:00 A.M. TO 5:00 P.M. PACIFIC TIME • TELEX II: 910-346-6362 • FAX: 213/217-0653

S-SH-1060

SLOTTED SHOWER CURTAIN ROD

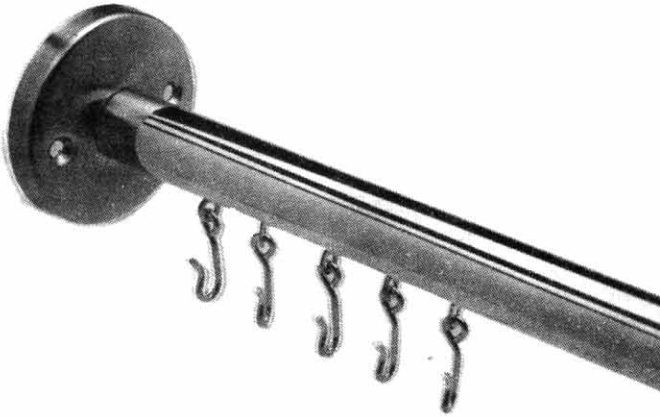

DESIGN CONSIDERATIONS

- The jointed design of the 1060 hook provides flexibility to relieve stress on the curtain.
- Hooks slide within the tubing, which protects the finish of the rod and promotes easy cleaning. These factors have made it the shower rod of choice in many major hotels, hospitals, and nursing homes.
- Shower curtain rods should not be specified in lieu of grab bars or any other support accessory.
- Shower curtains in vinyl, nylon and flame-resistant materials are also available from TSM to accompany its shower rods.



SUGGESTED ARCHITECTURAL SPECIFICATION

TSM model S-SH-1060 Slotted Shower Curtain Rod from Tubular Specialties Manufacturing, Inc., Los Angeles, California, (213) 515-4801. Tubing: slotted stainless steel Type 430 1" (25mm) x 28 gauge (0.4mm) x 60" (1524mm). Flanges: stainless steel Type 304 (18-8) 20 gauge (0.9mm), 3" (76mm) round, with exposed screws. Hooks (13): chrome-plated brass. Finish: bright polish. Installation Hardware: 2" (51mm) x #10 (5mm) stainless steel screws.



MATERIALS/WORKMANSHIP

Tubing—Stainless steel bright finish Type 430 28 gauge (0.4mm), 1" (25mm) outside diameter, rolled and formed construction. Standard length is 60" (1524mm); shorter lengths available.

Flanges (2)—Stainless steel Type 304 (18-8) 20 gauge (0.9mm). Each flange has two countersunk 3/16" (5mm) screw holes.

Hooks (13)—Chrome plated brass.



INSTALLATION

Surface mount flanges to wall at desired height (allow for standard shower curtain length of 72" [1829mm] plus approximately 2-1/4" [57mm] from top of curtain to centerline of rod). Screws are provided by manufacturer (see Installation, Reference Section C, for various applications).



GUARANTEED PRODUCT

SEE PAGE 3 FOR COMPLETE DETAILS

