



Tubular Specialties Manufacturing, Inc.

13011 South Spring Street, Los Angeles, CA 90061-1685

Phone 800/Grab Bar (800/472-2227) or 310/515-4801


www.GrabBar.com • Fax 310/217-0653

5201-C

Recessed Paper Towel Dispenser

Technical Data

Revised June 2007

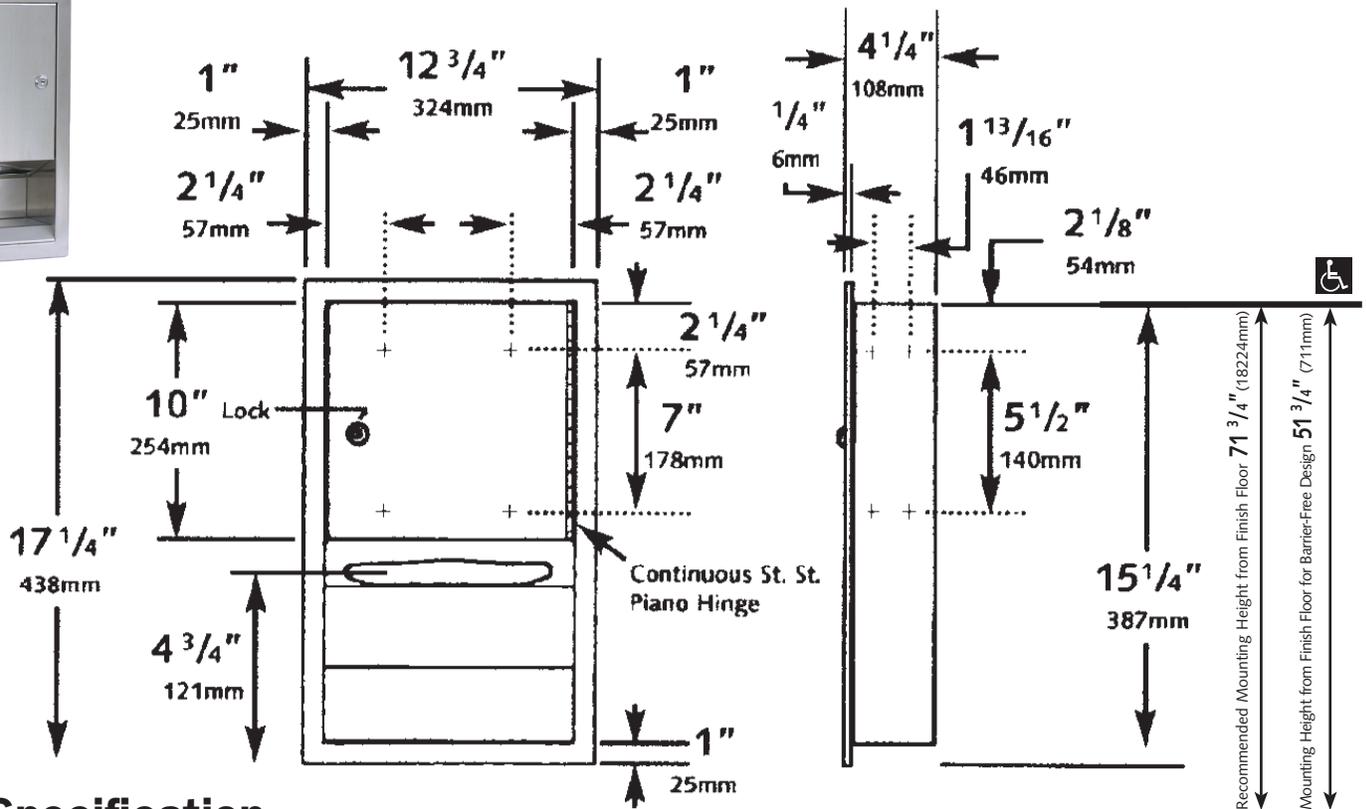

Specification

Recessed Paper Towel Dispenser shall be 22 gauge type 304 stainless steel with exposed surfaces satin finish. Structural assembly of all components shall be of welded construction and flange shall be drawn, one-piece construction. Door shall be secured to cabinet with full-length, welded $\frac{3}{16}$ " (5mm) dia. stainless steel multi-staked piano hinge; tumbler lock shall be

keyed like other TSM accessories. Paper towel dispenser shall dispense 350 C-fold or 475 multifold paper towels without additional adapters or trays.

Recessed Paper Towel Dispenser shall be Model 5201-C as manufactured by Tubular Specialties Manufacturing, 13011 South Spring Street, Los Angeles, California 90061, tel 800-Grab Bar.

Operation

Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in place and will continue to feel properly.

Installation

- Unit is recessed mounted in wall through concealed mounting holes provided. For compliance with ADA Accessibility Guidelines, unit should be installed so that towel dispenser slot is 54" (1372mm) maximum above finished floor (AFF) if clear floor side reach access is provided, or 48" (1219mm) maximum AFF is clear floor forward reach access only is provided. To comply with CalDAG mounting height, towel dispenser slot should be 40" (1016mm) AFF.

Note: The bottom of the rough wall opening is $\frac{3}{4}$ " (19mm) above bottom of unit.

- Rough wall opening is 11 $\frac{1}{4}$ " W x 15 $\frac{3}{4}$ " H x 4" D minimum (286mm x 400mm x 102mm).
- It is the installer's responsibility to select fasteners that are appropriate for the wall or partition condition and application.



TSM 5201-C Recessed PaperTowel Dispenser is guaranteed against defects in workmanship and material for one year from shipping date.