



Tubular Specialties Manufacturing, Inc.

13011 South Spring Street, Los Angeles, CA 90061-1685

Phone 800/Grab Bar (800/472-2227) or 310/515-4801


www.GrabBar.com • Fax 310/217-0653

5233

Surface-Mounted Paper Towel Dispenser

Technical Data

Revised April 2008

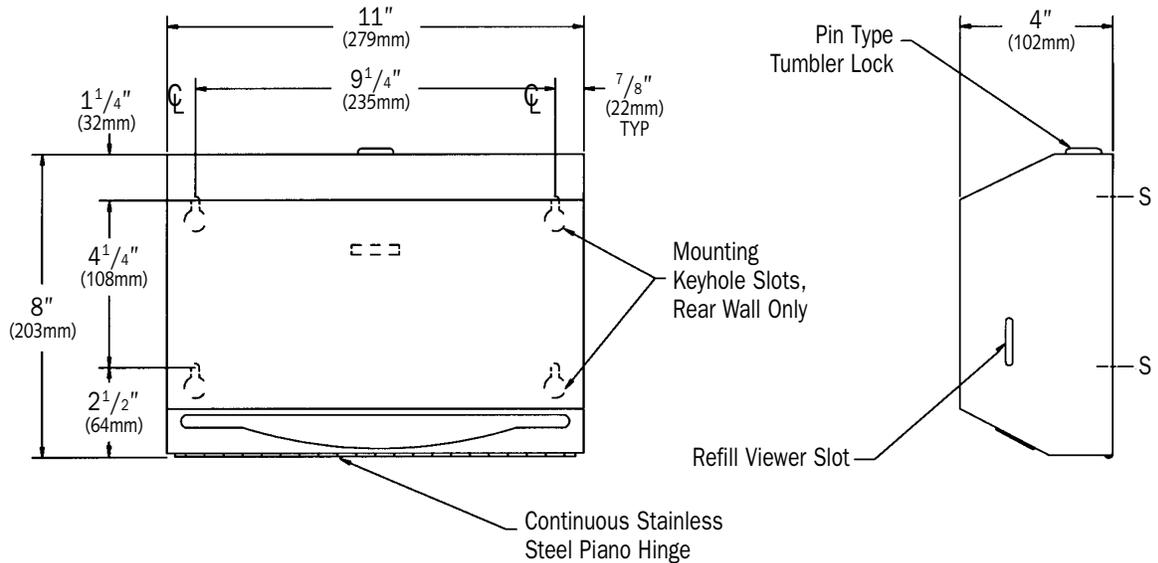

Specification

Surface-Mounted Paper Towel Dispenser shall hold and dispense 200 standard C-fold or 275 standard multi-fold paper towels. Unit shall be fabricated of alloy 18-8 type 304 stainless steel, 22 gauge. Towel dispensing slot shall have a fully hemmed-in rolled edge for snag-free dispensing and user safety. Dispenser door shall be attached to bottom of unit with a concealed full-length 3/16" (5mm) dia. multi-staked stainless steel piano hinge and shall be held closed with a tumbler lock keyed alike to other TSM washroom equipment. Structural assembly of body and door components shall be of welded construction. Unit

shall be provided with refill viewer slots on each side. Unit shall have internal towel stack guides. Wall shall be protected against uncontrolled door-drop damage by self-limiting body and hinge construction. Dispenser shall enable simplified installation by hanging on pre-installed screw pattern (by others). All exposed surfaces shall be #4 satin finish and shall be protected during shipment with PVC film easily removable after installation.

Surface-Mounted Paper Towel Dispenser shall be Model 5233 as manufactured by Tubular Specialties Manufacturing, 13011 South Spring Street, Los Angeles, California 90061, tel 800-Grab Bar.



Operation

Towels are self-feeding as withdrawn by hand until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly. Low level of towel supply is

indicated from 35% capacity to empty. Unit is a reduced-size model and has less capacity than larger models; therefore, it is recommended to use this unit in space-restricted or low traffic areas. Locking door prevents unauthorized access or removal.



Installation

1. Unit is surface mounted on wall or partition through concealed mounting holes provided. Four (4) mounting holes through back are keyhole slots for ease in hanging unit on pre-installed screws. Center top mounting hole is horizontal slot for ease of adjustment and vandal-resistant locking.
2. To comply with ADA Accessibility Guidelines, unit should be installed so that the towel dispenser slot is 48" (1219mm) maximum above finished floor (AFF) if clear floor access is

- provided, or 46" (1168mm) maximum AFF if side reach over an obstruction is only provided (i.e. vanity).
3. It is the installer's responsibility to select fasteners that are appropriate for the wall or partition condition and application.
4. Accessories should be inspected periodically to make sure their attachment to the wall is not loosening.



TSM 5233 Surface-Mounted Paper Towel Dispenser is guaranteed against defects in workmanship and material for one year from shipping date.