



Tubular Specialties Manufacturing, Inc.


13011 South Spring Street, Los Angeles, CA 90061-1685
Phone 800/CALL TSM (800/225-5876) or 310/515-4801
online www.grabbar.com • Fax 310/217-0653

861

Heavy-Duty Robe Hook Concealed Mounting

Technical Data

Revised Feb. 2001

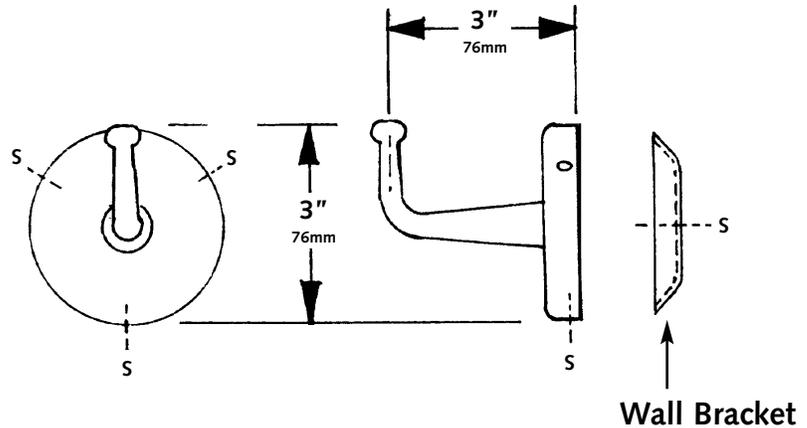

Suggested Architectural Specification

Model 861 Heavy Duty Robe Hook with Concealed Mounting from TSM. Tubular Specialties Manufacturing, Inc., Los Angeles, California, 800/Call TSM (800/225-5876).

Hook is solid cast brass with satin chrome finish. Fastens to wall bracket with three (3) stainless steel set screws.



Materials/Workmanship

Hook and Wall Bracket

Solid cast brass with satin chrome finish. Hook secures to wall bracket with three (3) set screws provided by manufacturer.



Installation

1. Suggested mounting height is 60" from finish floor to centerline of hook (1524mm).
2. Unit is surface mounted on wall at locations marked by an "S".
3. For plaster or dry wall, provide in-wall backing complying with local building codes.
4. For other surfaces, provide fiber plugs or expansion shields for use with screws provided by manufacturer, or provide toggle bolts or expansion bolts.
5. Attach cover flange to wall bracket with Allen head set screws provided.

Manufacturer reserves the right to alter design or dimensions without formal notice and without incurring obligation.



Guarantee

TSM 861 Heavy Duty Robe Hook is guaranteed against defects in workmanship and material for one year from shipping date.