



Since 1966

Tubular Specialties Manufacturing, Inc.



13011 South Spring Street, Los Angeles, CA 90061-1685
Phone 800/CALL TSM (800/225-5876) or 310/515-4801
online www.grabbar.com • Fax 310/217-0653

875-C

Technical Data

Revised July 2001

Round Towel Bar, Concealed Screw

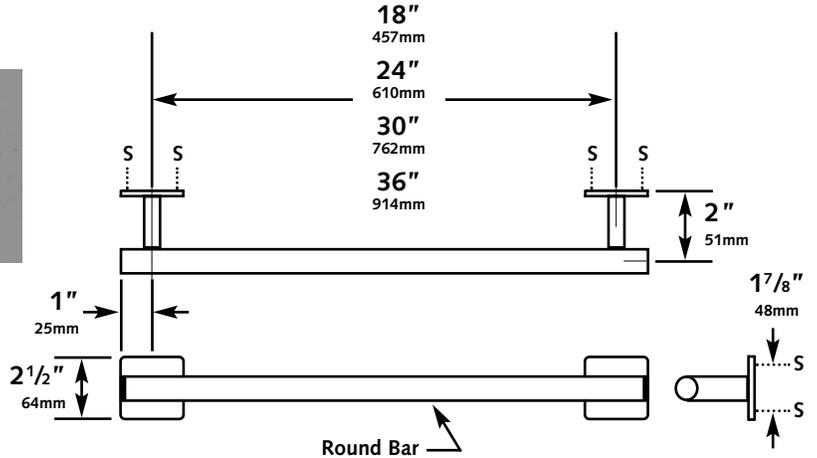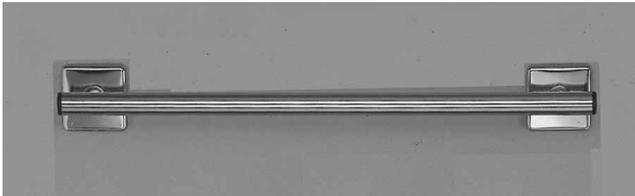

Model Numbers

- 875-C-1818" Length
- 875-C-2424" Length
- 875-C-3030" Length
- 875-C-3636" Length



Suggested Architectural Specification

TSM Model [875-C-18] [875-C-24] [875-C-30] [875-C-36] Round Towel Bar from Tubular Specialties Manufacturing, Inc., Los Angeles, California, 310/515-4801 or 800/Call TSM (800/225-5876).

Tubing: Stainless steel type 304 (18-8) 7/8" x 20 gauge (22x0.9mm) bright polished finish round tubing with black plastic plugs press fit into ends. Flanges: Stainless steel type 304 (18-8); 20 gauge (0.9mm) square concealed screw covers snap lock over 14 gauge (1.9mm) base flanges.



Materials/Workmanship

- Tubing and Posts** Stainless steel type 304 (18-8) 7/8" x 20 gauge (22x0.9mm) round tubing, bright polished finished. Tubing, posts and flanges are mechanically attached by a 2" x #10 (51x5mm) machine screw and hex nut. Black plastic plugs are press fit into ends.
- Wall Flanges** Stainless steel type 304 (18-8) 14 gauge (1.9mm).
- Flange Cover** Stainless steel type 304 (18-8) 20 gauge (0.9mm), snap locks over wall flange.



Installation

1. Unit is surface mounted on wall using screws provided by manufacturer at locations marked by an "S".
2. For plaster or dry wall, provide in-wall backing complying with local building codes.
3. For other surfaces, provide fiber plugs or expansion shields for use with screws provided by manufacturer, or provide toggle bolts or expansion bolts.
4. Align cover flange dimples over notches on wall flange and gently tap in place with a rubber-tipped hammer.

Manufacturer reserves the right to alter design or dimensions without formal notice and without incurring obligation.



Guarantee

TSM 875-C Round Towel Bar is guaranteed against defects in workmanship and material for one year from shipping date.