

TSM's numbering system is straightforward and easy to comprehend. Each part of the model number describes either the configuration or a feature of the bar. In most cases, the model number corresponds to the dimensions of the bar. For instance, in the example below the model 1632 measures 16" horizontal x 32" vertical centerline. A modification of the bar at 17" horizontal x 21" vertical would be model 1632M @ 17" x 21".

The Numbering System...

MODEL NUMBER	=	Tubing Outside Diameter	—	Configuration (or length of bar)	/	Flange	/	Finish, Handing
		S = 1" (25mm) Q = 1¼" (32mm) H = 1½" (38mm)		See Pages 18-22		See Page 15		See Below

S stands for 'standard' and represents 1" tubing, for when TSM first began, 1" O.D. was the most commonly ordered size. It is still the tubing of choice for children (and some adults prefer the small grip as well.) However, 1" tubing does not meet any building codes. 18 gauge is standard; 16 gauge is available upon request.




Q stands for 'quarter' and represents 1¼" O.D. tubing. Q is the economical choice for building projects that do not require 1½" O.D. It is perhaps the easiest tubing size for adults to grasp. 18 gauge is standard; 16 and 12 gauge are available upon request.

H stands for 'half' and represents 1½" O.D. tubing. H is a heavy-duty size tubing that serves the dual purpose of providing either a handhold or, if preferred, a 'shelf' to lean upon. H meets or exceeds all U.S. building codes. 18 gauge is standard; 16 and 12 gauge are available upon request.

TECH DATA

TECH DATA

Examples:

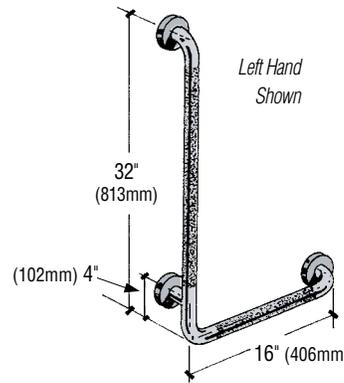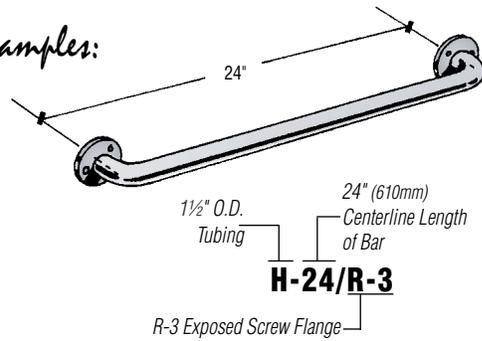

Right or left handing is determined from the viewpoint of the grab bar user. For shower and tub entry bars, the vertical arms are handed from the point of entry, not exit.

Grab Bar Series All Type 304 Stainless Steel

	Finish	S	Q	H
Satin	Satin	S/CS-1	Q/CS-1	H/CS-1
	Peened	S/CS-1/P	Q/CS-1/P	H/CS-1/P
	Knurled	S/CS-1/K	Q/CS-1/K	H/CS-1/K
	Anti-Slip	S/CS-1/ASLP	Q/CS-1/ASLP	H/CS-1/ASLP
	Ripple Grip™	N/A	Q/CS-1/RG	H/CS-1/RG
Bright	Bright	S/CS-1/B	Q/CS-1/B	H/CS-1/B
	Bright & Peened	S/CS-1/B/P	Q/CS-1/B/P	H/CS-1/B/P
	Bright & Knurled	S/CS-1/B/K	Q/CS-1/B/K	H/CS-1/B/K
	Bright & Anti-Slip	S/CS-1/B/ASLP	Q/CS-1/B/ASLP	H/CS-1/B/ASLP
	Bright & Ripple Grip™	N/A	Q/CS-1/B/RG	H/CS-1/B/RG
Powdercoated	Powdercoated	S/CS-1/POWD	Q/CS-1/POWD	H/CS-1/POWD
	Powdercoated & Anti-Slip	S/CS-1/POWD/ASLP	Q/CS-1/POWD/ASLP	H/CS-1/POWD/ASLP
	Powdercoated & Ripple Grip™	N/A	Q/CS-1/POWD/RG	H/CS-1/POWD/RG
Plated	Plated	S/CS-1/PLAT	Q/CS-1/PLAT	H/CS-1/PLAT
	Plated & Knurled	S/CS-1/PLAT/K	Q/CS-1/PLAT/K	H/CS-1/PLAT/K
	Plated & Anti-Slip	S/CS-1/PLAT/ASLP	Q/CS-1/PLAT/ASLP	H/CS-1/PLAT/ASLP
	Plated & Ripple Grip™	N/A	Q/CS-1/PLAT/RG	H/CS-1/PLAT/RG

All series above feature the CS-1 flange; substitute D-1, FS-1, etc. for alternate flange choice. Add configurations shown on pages 18-23 after S, Q or H to complete model number. For example, Q-12/CS-1/P or H-2040/FS-1/POWD in Almond. See page 3 for complete powdercoating and plating color chart.

Shower Rod Tubing



Shower rod tubing is available in either stainless steel type 304 or brass alloy CDA 274 in a variety of diameters and gauges. To minimize scratches, fingerprints and watermarks, satin finish is recommended for either metal. Economy shower rods are available in bright mill finish aluminum.

Standard lengths of tubing for shower rods (custom lengths readily available)

36" (914mm)	48" (1219mm)	72" (1829mm)	96" (2438mm)
42" (1067mm)	60" (1524mm)	84" (2134mm)	

Stainless steel shower rods are available in satin or bright finish. The top rod features Q/CS-1 Series with 1 1/4" O.D. satin tubing and round concealed screw flanges, SC Nylon shower curtain in white and SC-HX stainless steel hooks. The bottom rod features S-1060/SH-1 Series with 1" O.D. bright finish slotted rod tubing with chrome plated steel hooks, exposed screw flanges and SCFR Flame-Resistant shower curtain in oatmeal.

Brass Shower Rod Tubing Model Numbers

Tubing Diameter	Finish	18 ga. (1.2mm) Satin	18 ga. (1.2mm) Bright	20 ga. (.9mm) Satin	20 ga. (.9mm) Bright	28 ga. (.4mm) Bright	24 ga. (.6mm) Bright	16 ga. (1.7mm) Satin	16 ga. (1.7mm) Bright	18 ga. (1.2mm) Satin	18 ga. (1.2mm) Bright
		TECH DATA		TECH DATA		TECH DATA		TECH DATA		TECH DATA	
1"		S-106(49)	S-106(49)/B	S-106(35)	S-106(35)/B	S-106(15)/B Lockseam	S-1060(22)/B 60" Slotted Rod (hooks included)	S-106(62)/SB	S-106(62)/BB	S-106(49)/SB	S-106(49)/BB
1 1/4"		Q-106(49)	Q-106(49)/B	Q-106(35)	Q-106(35)/B	N/A	N/A	Q-106(62)/SB	Q-106(62)/BB	Q-106(49)/SB	Q-106(49)/BB

Stainless Steel Shower Rod Flanges


Base Plate = 14 gauge, Cover = 20 gauge (2.1 & .9mm) except where noted. Screws not included. Please see page 23 for fasteners.



TECH DATA


Round Exposed Screw

- S-SH-1 - 1" Satin S/S
- Q-SH-1 - 1 1/4" Satin S/S
- S-SH-1/B - 1" Bright S/S
- Q-SH-1/B - 1 1/4" Bright S/S



Neo-Angle Round Exposed Screw


- S-SH-45 - 1" Satin S/S
- Q-SH-45 - 1 1/4" Satin S/S
- S-SH-45/B - 1" Bright S/S
- Q-SH-45/B - 1 1/4" Bright S/S



TECH DATA


Round Concealed Screw

- S-CS-1 - 1" Satin S/S
- Q-CS-1 - 1 1/4" Satin S/S
- S-CS-1/B - 1" Bright S/S
- Q-CS-1/B - 1 1/4" Bright S/S



Rnd Concealed Screw w/ Sleeve


- S-CS/SLEV - 1" Satin S/S
- Q-CS/SLEV - 1 1/4" Satin S/S
- S-CS/SLEV/B - 1" Bright S/S
- Q-CS/SLEV/B - 1 1/4" Bright S/S



TECH DATA


Square Concealed Screw

- S-FS-1 - 1" Satin S/S
- Q-FS-1 - 1 1/4" Satin S/S
- S-FS-1/B - 1" Bright S/S
- Q-FS-1/B - 1 1/4" Bright S/S



Round Concealed Screw

- S-SH-2 - 1" Satin Chrome Brass




Brass Shower Rod Flanges

Base Plate = 14 gauge, Cover = 20 gauge (2.1 & .9 mm) except where noted.




Round Concealed Screw

- S-CS-1/SB - 1" Satin
- Q-CS-1/SB - 1 1/4" Satin
- S-CS-1/BB - 1" Bright
- S-CS-1/BB - 1" Bright



Round Concealed Screw with Sleeve

- S-CS-SLEV/PLSB - 1" Plated Satin
- Q-CS-SLEV/PLSB - 1 1/4" Plated Satin
- S-CS-SLEV/PLBB - 1" Plated Bright
- S-CS-SLEV/PLBB - 1" Plated Bright




Economy Shower Rods



Adjustable Twist-In Flange

- No screws necessary to install. Twists clockwise to tighten to wall.
- S-SH-5/Z - 1" Bright Chrome Zamac
- S-SH-5/P - 1" Bright Chrome Plastic



Aluminum Shower Rod Tubing

- 1" x .015 (28 ga.) Bright Mill Finish
- S-106(15)/A @ 60"
- S-106(15)/A @ 72"