

**TSM** offers a variety of bars to assist at the toilet. There are bars that straddle the toilet bowl and provide a firm grip for both arms, sidewall bars, corner bars, and even swingaway and swingup bars. Dimensions are centerline unless noted otherwise. Fastener kits are ordered separately (see page 23). Almost any bar shown can be modified to different dimensions. Let us know your requirements. See page 21 for custom bars.

These toilet bars are Q/CS-1 satin finish stainless steel with 1 1/4" (32mm) tubing and concealed screw flanges. Left hand is shown in each case except for the 2040M, which is not handed.

- A** - Q-2245/CS-1 45° Inclined Bar
- B** - Q-1220/CS-1 Boomerang Bar
- C** - Q-832/CS-1, LH Hockey Stick
- D** - Q-2040M/CS-1 @ 36" x 48" (914mm x 1219mm) Horizontal Corner Bar

### Straight Bars

#### Basic Straight Bar



#### Standard Lengths

12" (305mm)	30" (762mm)	42" (1067mm)
16" (406mm)	32" (813mm)	48" (1219mm)
18" (457mm)	36" (914mm)	52" (1321mm)
24" (610mm)	40" (1016mm)	54" (1372mm)


#### "M" Adds a Mid Support



#### Standard Lengths

36M (914mm)	54M (1372mm)	96M (2438mm)
42M (1067mm)	60M (1524mm)	108M (2743mm)
48M (1219mm)	72M (1829mm)	
52M (1321mm)	84M (2134mm)	

#### "CM" is a Corner Mount

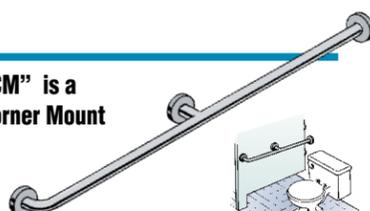


#### Standard Lengths

42CM (1067mm)	52CM (1321mm)
48CM (1219mm)	54CM (1372mm)


### Toilet Wall-to-Floor Bars

**3033 & 3033D:** These surface-mounted bars utilize outriggers at floor to stabilize. If the bar is on the right when the user is sitting on the toilet, specify right hand. If reverse, specify left. **3033WX:** Provides the same function as the 3033 without outrigger at floor; however, the bar has a 4" extension set into a concrete floor. **3033Y:** Exceptionally sturdy design allows surface mounting without outrigger or extension. Satin stainless steel tubing and bright chrome-plated brass cover flanges slip over steel liners attached to wall and floor.


#### 3033 Wall-to-Floor Bar with Outrigger

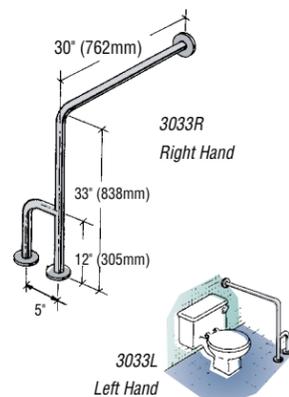


#### 3033D Wall-to-Floor Bar with Double Outrigger

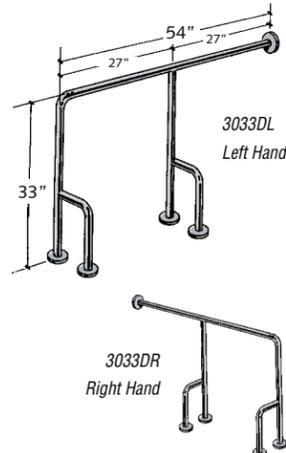

#### 3033WX Wall-to-Floor Bar with 4" Extension

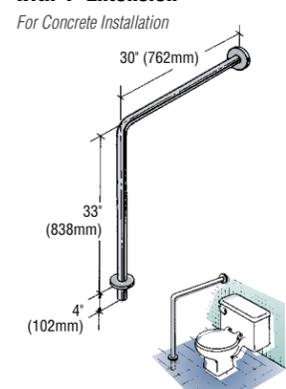

#### 3033Y Wall-to-Floor Bar




Plastic arm rest not available on 1 1/2" (32mm, Q Series).

### Toilet Bars


#### 1818-T Safety Arm Rest

Detachable for easy cleaning.




Extra-wide legs for easy access by wheelchair users. The 1822-F mounts to the floor and the 1818-FM-3 tilts up for easy cleaning. Both bars fit toilet bowl height of 15" - 15 1/2" (381-394mm), but can be modified to fit your requirements.

#### 1822-F Wheelchair Toilet Bar

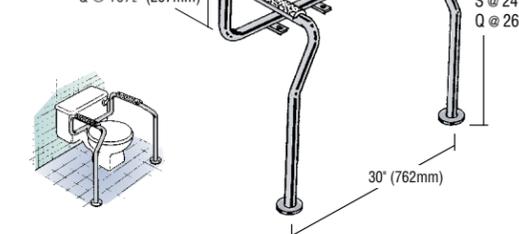

#### 1818-FM-3 Tilt-Up Safety Arm Rest

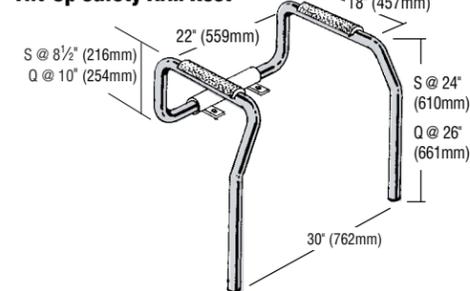

### Angle Bars

These bars are excellent for walls with limited space. Fastener Kits are ordered separately (see page 23).


#### 832 Hockey Stick




#### 2245 45° Inclined Bar




#### 2020 Combination Grab Bar



#### 1220 Boomerang Bar

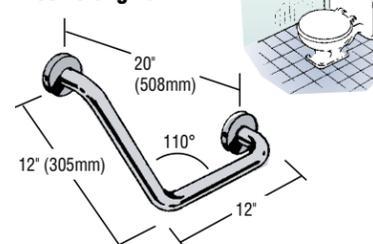


#### 1220M Boomerang Bar with Center Support

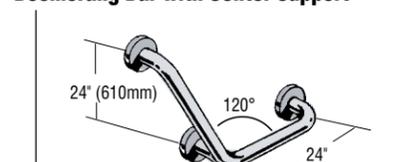


### Straddle Bars

Straddle bars provide support on both sides of the toilet. The 2424-S, 2424-SF and 2424-SN are wall mounted for simple maintenance around toilet. Where wheelchair accessibility is desired, width of straddle bars may be ordered at 30" (762mm) (add -30 to model #). The crossbar on the 2424-SN is attached to the parallel bars at the jobsite with epoxy provided by TSM. For removable crossbar with set screws, specify 2424-SNR.


#### 2424-S Straddle Bar




#### 2424-SF Straddle Bar for Flush Valve

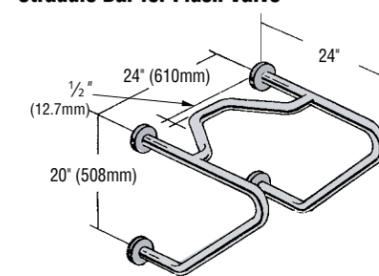


#### 2424-SN Straddle Bar for Tank Toilet

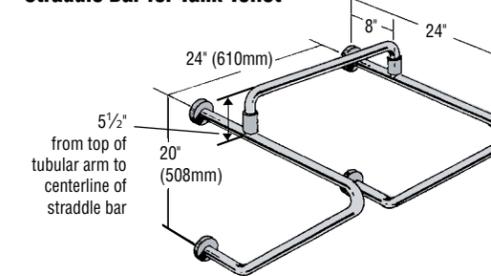

#### 2228-S Floor-Mounted Straddle Bar

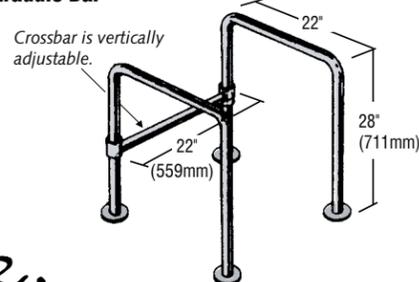


#### 2430-S Wall-to-Floor Straddle Bar

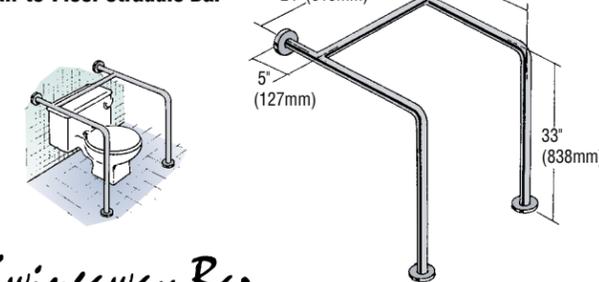

### Swingup Bar

#### 3012 Swingup Bar

Bar swings up out of the way when not in use and is lowered into position when needed. The bar moves smoothly and easily due to tension in the hinge which also prevents it from free falling. Specify 3012-PD for toilet paper dispenser.

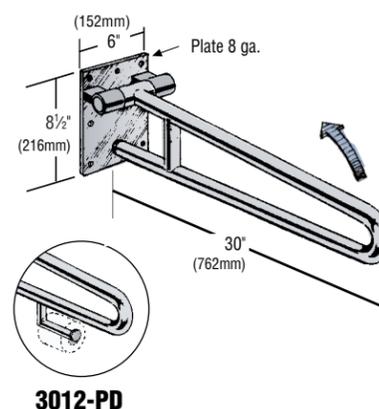

### Swingaway Bar

#### 901 Swingaway Bar

Bar swings out of way when not in use. A simple lifting motion allows user to lock arm securely in any of three positions 90° apart. To eliminate maintenance and repairs, no springs are used. Specify 901-PD for toilet paper dispenser.

