#### **Tubular Specialties Manufacturing, Inc.**

13011 South Spring Street, Los Angeles, CA 90061-1685 Phone 800/Grab Bar (800/472-2227) or 310/515-4801 www.GrabBar.com • Fax 310/217-0653


# **Surface-Mounted Roll Paper Towel Dispenser**

Technical Data Revised April 2006

5231



Since 1966

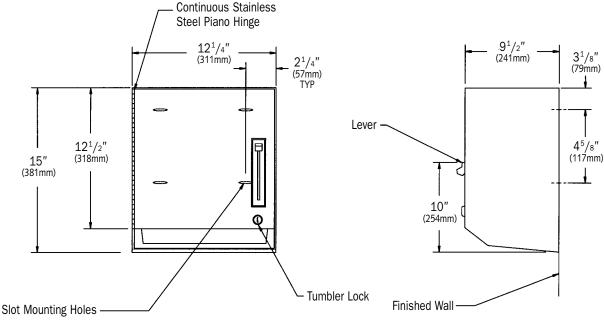



## **Specification**

Surface-Mounted Roll Paper Towel Dispenser shall hold and dispense one 8" or 9" (203 or 229mm) wide up to 800 feet (244m) long standard towel roll and one stub roll up to 4" (102mm) diameter. Automatic transfer mechanism shall dispense towels from stub roll before starting new roll. Lever shall operate unit and shall adjust to dispense 2<sup>1</sup>/<sub>2</sub>", 4" or 5" (64, 102 and 127mm) preset length of towel. Unit frame and cabinet shall be fabricated of alloy 18-8 type 304 stainless steel, 22 gauge. Door shall be fabricated of 18 gauge. Towel dispensing slot shall be smooth and burr-free for snag-free dispensing and user safety. Roll paper towel mechanism shall be



### Operation

Towels are fed by lever action until supply is depleted. Towel feed length is adjustable for economy by pin (supplied) which



# Installation

- 1. To comply with ADA Accessibility Guidelines, unit should be installed so that the towel dispenser lever is 54" (1372mm) maximum above finished floor (AFF) if clear floor side reach access is provided, or 48" (1219mm) maximum AFF if clear floor forward reach access only is provided.
- 2. It is the installer's responsibility to select fasteners that are appropriate for the wall or partition condition and application.

© 2006, Tubular Specialties Mfg., Inc. All Rights Reserved

Manufacturer reserves the right to alter design or dimensions without formal notice and without incurring obligation.

enamel painted steel. Door shall be attached to cabinet at side with a full-length 3/16" (5mm) dia. multi-staked stainless steel piano hinge and shall be held closed with a tumbler lock keyed alike to other TSM washroom equipment. Structural assembly of all components shall be of welded construction. All exposed surfaces shall be #4 satin finish and shall be protected during shipment with PVC film easily removable after installation.

Surface-Mounted Roll Paper Towel Dispenser shall be Model 5231 as manufactured by Tubular Specialties Manufacturing, 13011 South Spring Street, Los Angeles, California 90061, tel 800-Grab Bar.

limits lever stroke length. Unit may be reloaded with a full roll to automatically start when finished with an existing partial roll. Locking door prevents unauthorized access or removal.

- 3. Unit is surface mounted on wall through concealed mounting holes provided.
- 4. Accessories should be inspected periodically to make sure their attachment to the wall is not loosening.

