



Tubular Specialties Manufacturing, Inc.


13011 South Spring Street, Los Angeles, CA 90061-1685
 Phone 800/CALL TSM (800/225-5876) or 310/515-4801
 online www.grabbar.com • Fax 310/217-0653

351

Technical Data

Revised August 2001

Partition Mtd TP Dispenser, Dual Access

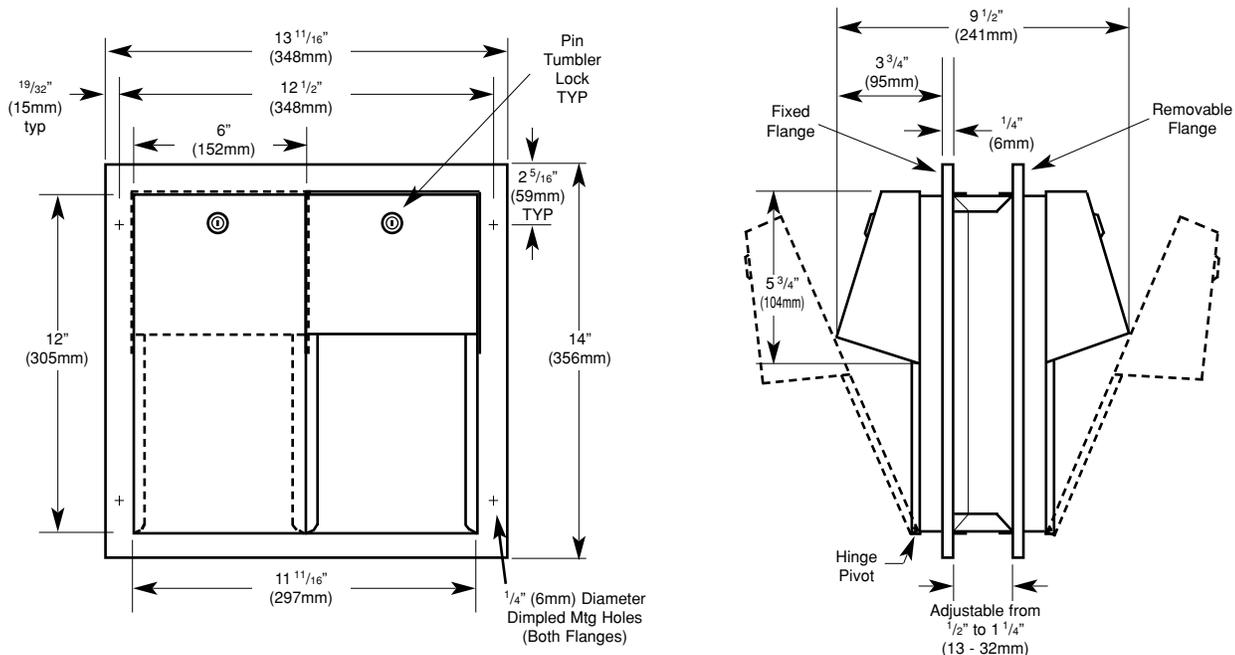

Suggested Architectural Specification

TSM Model 351 Partition Mounted Dual Access Toilet Paper Dispenser from Tubular Specialties Manufacturing, Inc., Los Angeles, California, 310/515-4801 or 800/Call TSM (800/225-5876). Construction: Cabinet body is type 304 (18-8) satin finish 22 gauge stainless steel. Doors, door frames and dispensing mechanism guide tracks fabricated of 18 gauge. Structural assembly of body and door components is welded construction.

Rollers (4) are vandal-resistant, high-impact ABS plastic with stainless steel pins molded in. Tumbler lock keyed like other TSM accessories. Capacity: Dispenses two standard-core toilet tissue rolls up to 5 1/4" diameter (1800 sheets). Operation: Extra roll drops into place when roll is depleted and is accessed by unlocking cabinet. Accommodates partitions from 1/2" to 1-1/4" thick.



Operation

Unit holds four standard-core toilet tissue rolls up to 5 1/4" (133mm) diameter (1800 sheets). When roll is depleted it

slides to rear of cabinet and extra roll drops into place. Empty rolls can only be accessed by unlocking cabinet.



Installation

1. Partition mount using four #10 self-tapping screws supplied by manufacturer through fixed mounting frame and adjustable mounting frame.
2. Partition cutout required is 11-7/8"W x 12-1/4"H x 1/2" to 3" partition thickness.

3. Mounting flanges adjust to accommodate partition thickness of 1/2" minimum to 1-1/4" maximum.
4. To comply with ADA Accessibility Guidelines, top of unit should be installed 29" above finished floor.

Manufacturer reserves the right to alter design or dimensions without formal notice and without incurring obligation.



Guarantee

TSM 351 Partition Mounted 4-Roll Dual Access Toilet Paper Dispenser is guaranteed against defects in workmanship and material for one year from shipping date.